

# Hisense

life **re**imagined

## Room Freestanding Cooling & Heating Series


Enjoy Life with Hisense



# T1-R410A Heating and Cooling Series



R-410A 50Hz

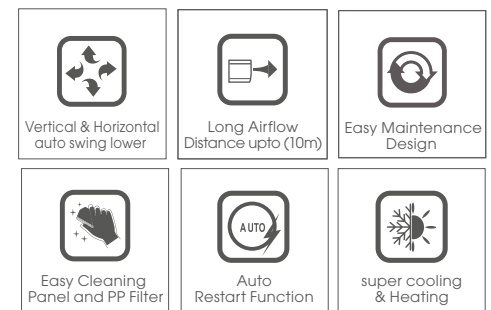

Model			AUF-36HTR4SDCPA	AUF-48HTR6SDMPA	AUF-60HTR6SEMPA
Power supply		V-ph-Hz	220-240-1-50	380-415-3-50	380-415-3-50
Max. input consumption		W	4600	5760	8315
Max. input current		A	26.0	11.4	14.8
Cooling	Capacity	W	10000	13000	15500
	Capacity	Btu/h	34120	44356	52886
	Input	W	3320	4170	4980
Heating	Capacity	W	11000	13500	16500
	Capacity	Btu/h	37532	46062	56298
	Input	W	3225	3700	4830
Indoor air flow Rated(Hi/Med/Lo)		m3/h	1000	1750	2000
Indoor noise level (Hi/Med/Lo)		dB(A)	46/45/44	52/50/48	52/50/48
Controller			wireless	wireless	wireless
	Type		ROTARY	ROTARY	ROTARY
	Brand		Highly	Highly	HIGHLY
Outdoor noise level (sound pressure)		dB(A)	60	60	60
Throttle type			Throttle Valve	Throttle Valve	Capillary
Indoor unit	Dimension (WxHxD)	mm	500×1760×280	580×1870×380	580×1870×380
	Packing(WxHxD)	mm	610×1890×410	690×2000×480	690×2000×480
	Net/Gross weight	kg	34/40	50/60	52/62
Outdoor unit	Dimension(WxHxD)	mm	885×795×366	885×795×366	950×1050×340
	Packing(WxHxD)	mm	1050×890×510	1050×890×510	1110×460×1200
	Net/Gross weight	kg	67/72	67/72	96/103
Refrigerant type/Quantity	Type		R410A	R410A	R410A
	Charged volume	kg	2.20	2.48	2.40
Refrigerant piping	Liquid side/ Gas side	mm(inch)	Φ9.52/Φ15.88(3/8"/5/8')	9.52(3/8")/19.05(3/4")	9.52(3/8")/19.05(3/4")
	Max. pipe length	m	30	50	50
	Max. difference in level	m	20	30	30
Ambient temperature	Cooling	°C	16~52	16~52	16~52
	Heating	°C	-7~24	-7~24	-7~24
Stuffing Qty/per 40'HQ			73	55	43